






DICOUSTIC

Acoustic PET Felt Panels

F-PC016- Imagination

1200 x 2400 x 12 mm 1200 x 2400 x 24 mm

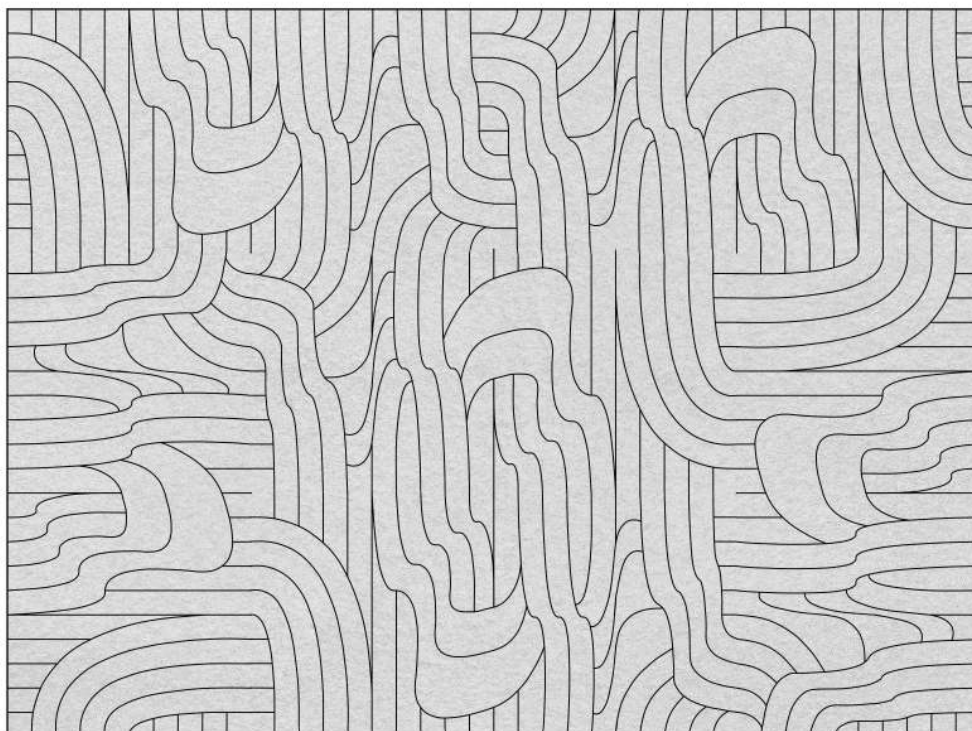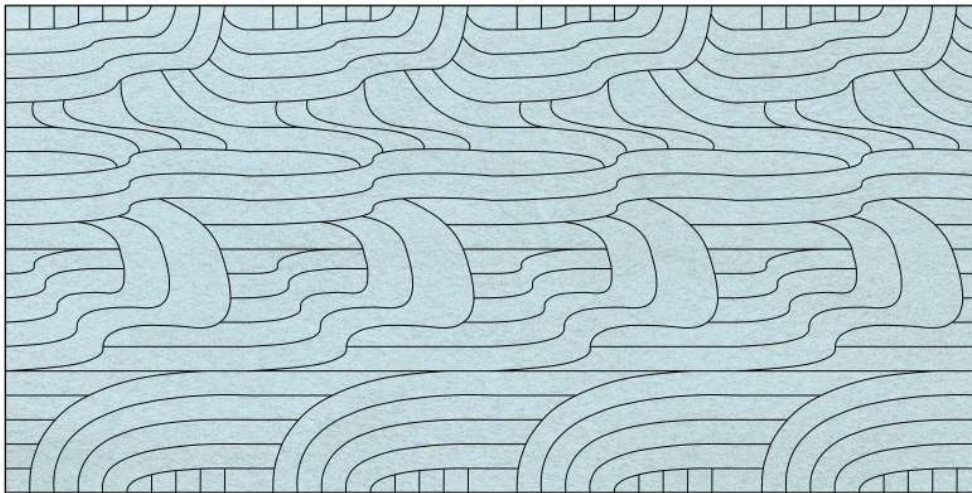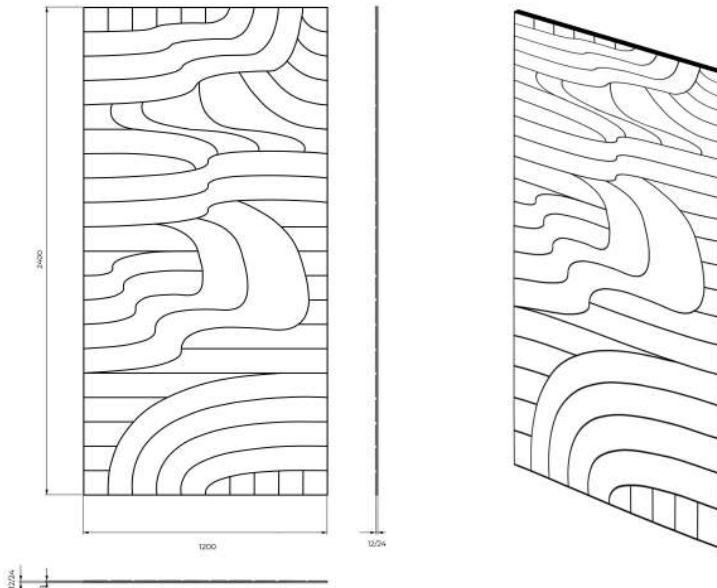

Imagination design explores organic flow through layered curvature and contour. The design evokes a topographic landscape—soft, undulating lines rise and fall in harmony, creating a sense of movement, depth, and calm. Its multidirectional rhythm allows for seamless continuity across panels, making it ideal for large-scale surface applications that seek to inspire

Product Specifications

Panel Dimensions	1200 mm x 2400 mm
Composition	Min. %75 post-consumer recycled materials (PET Bottles)
Tolerance	± %0.5
Thickness	12 mm , 24 mm
Thermal Performance	DI-Panel 12 mm (R0.41 (@15c) DI-Panel 24 mm (R0.82 (@15c)
Microbial Resistance	ASTM (G15- 21) Growth rating: 0 (No Growth) Dicooustic Panel does not promote the growth of moulds and mildew
Absorption Coefficient According to ISO 354	(12 mm) - NRC 0.45 (12 mm with 25 mm air gap) - NRC 0.7 (24 mm) - NRC 0.7 (24 mm with 25 mm air gap) - NRC 0.8
VOC	Private Office-Wall-Pass School Classroom-Wall-Pass Single Family Residence-Wall-Pass Private Office-Ceiling-Pass School Classroom-Ceiling-Pass Single Family Residence-Ceiling-pass
Fire ratings DICOUSTIC Panels has been evaluated using the following test method	EN13501-1:2018 Class B-s2,d0 **ASTM E84-2018 Class A ** Optional



Acoustical



Easy Install



Fire-Rated



Easy Clean



Printable



Light Weight



Recyclable



Recycled PET



VOC Free



Insulation



Impact Resistant



Antimicrobial



Tackable




5 YEAR
Warranty


Custom colors MOQ-1500 Sqm
For further cleaning details please refer to our DICOUSTIC Product Cleaning Guide

Layout Possibilities


Uniform Pattern

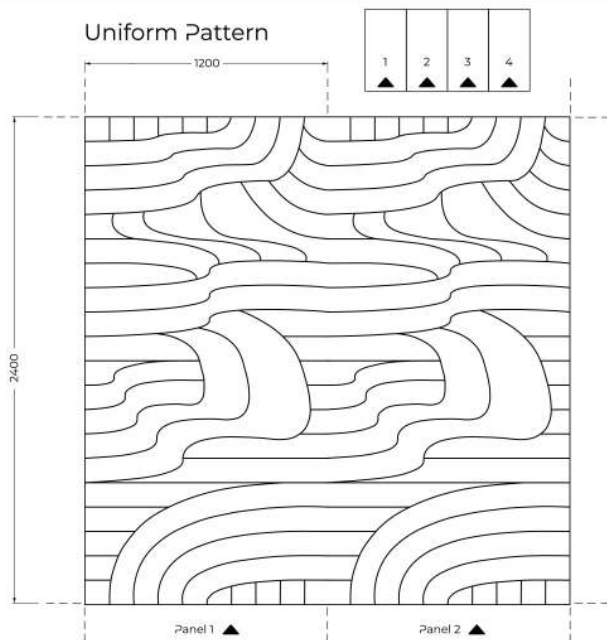

Inverted Pattern

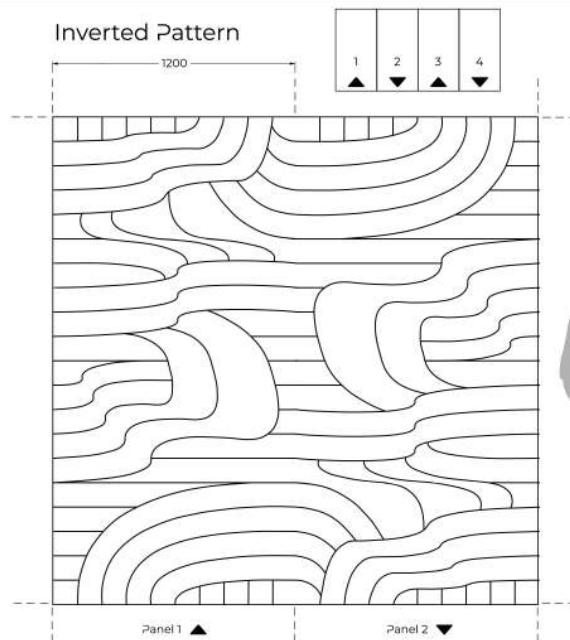

VERTICAL AND HORIZONTAL MIX LAYOUT

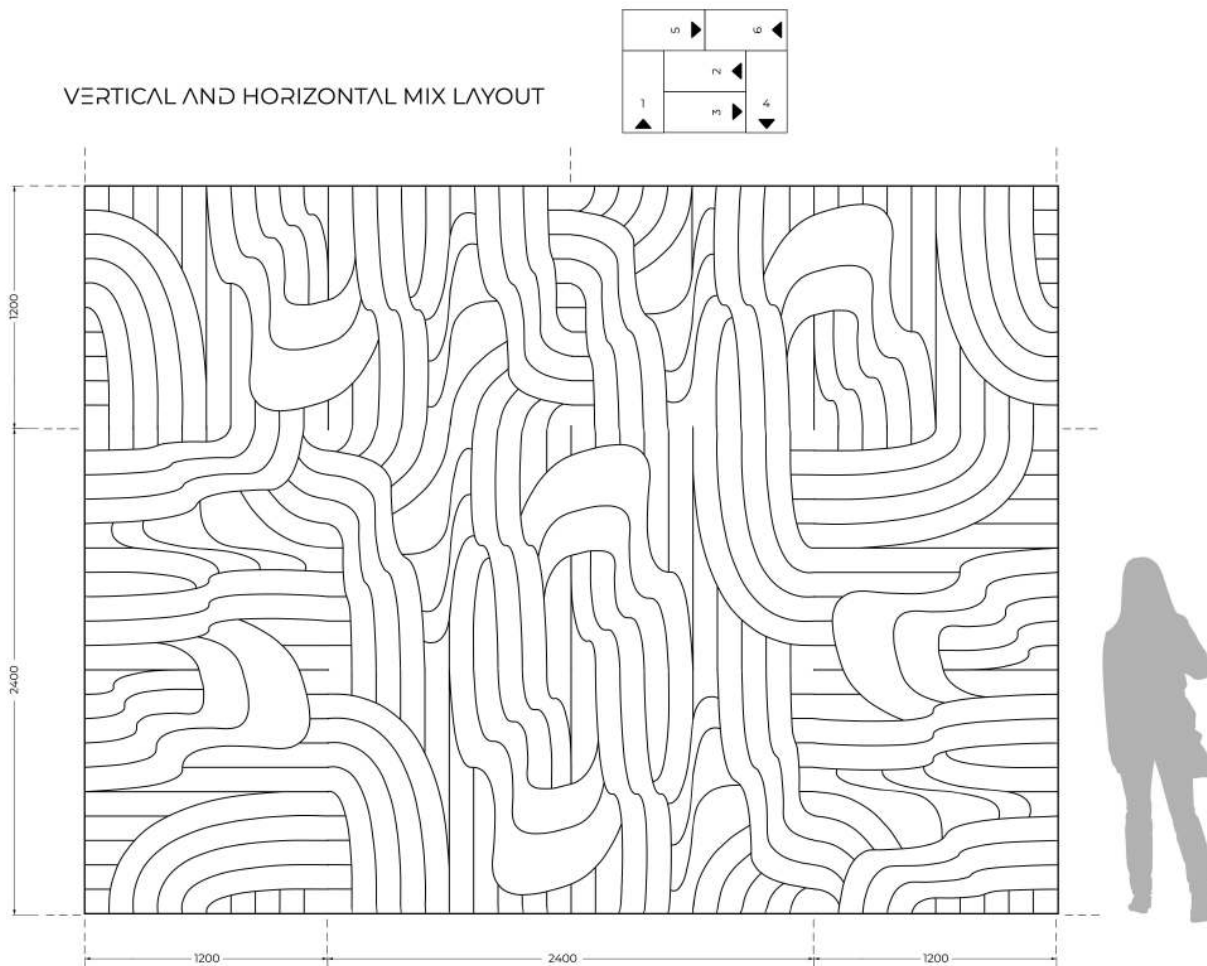

Acoustic PET Felt Color Range

