





DICOUSTIC

Acoustic PET Felt Panels

Design DI-PS015
3200x3500x15mm

Infinity 15

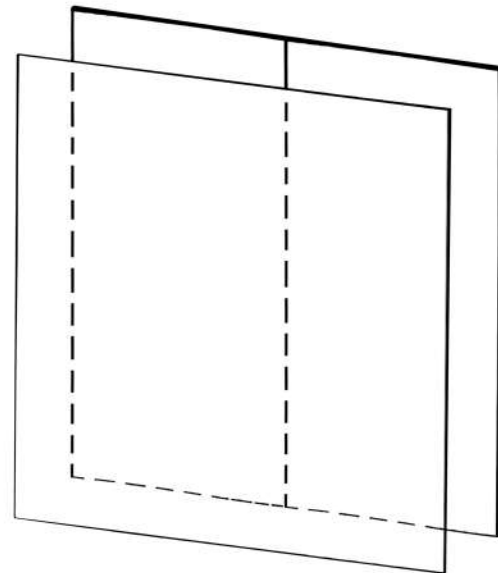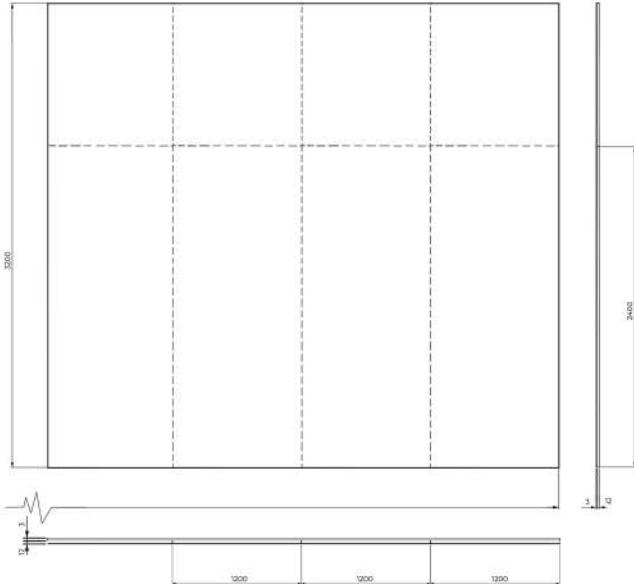

Product Specifications

Dimensions	3200 mm x 3500 mm
Tolerance	± %0.5
Thickness	15 mm
Density	3000 gsm
Thermal Performance	DI-Panel 15mm (R0.41 (@15c)
Microbial Resistance	ASTM (G15- 21) Growth rating: 0 (No Growth) Dicooustic Panel does not promote the growth of moulds and mildew
Absorption Coefficient According to ISO 354	(15mm) - NRC 0.45 (15mm with 25 mm air gap) - NRC 0.7
Fire ratings DICOUSTIC Panels has been evaluated using the following test method	EN13501-1:2018 Class B-s2,d0 *ASTM E84-2018 Class A * Optional
By Others	Gypsum Ceiling & Suspension System



Made from Recycled PET Bottles



Wipe with a damp cloth



Use carpet or upholstery shampoo as directed



Avoid rubbing and excessive amounts of water as this will affect the finish



Custom printed DICOUSTIC Panel requires the service of a specialist cleaning

* For further cleaning details please refer to our DICOUSTIC Product Cleaning Guide

www.dicooustic.com



Acoustic PET Felt Color Range**



DI-551 - Glacier



DI-560 - Drizzle



DI-556 - Apex



DI-553 - Vanta

* Customized dimensions can be provided with additional charge, please revert to supplier for more information

** Customized colors can be provided with additional charge, please revert to supplier for more information