



LED RING LIGHT SERIES


- Flexible diameter size to choose from
- Three color frame finishes (Black, White , Silver)
- Aluminum body construction
- Operation Voltage: AC220-240V
- Direct illumination
- Efficiency: $\geq 85\text{lm/w}$
- CRI: ≥ 80
- Standard aircraft / power cable Length 1500mm (can be customized)

Configuration


Diameter*	Power feed canopy	Suspension type	Suspension points	Driver Qty	Direct Lumen/Watt
600mm	D250mm x1	Straight	3	2	3400/40W
900mm	D250mm x1	Straight	4	2	4760/60W
1200mm	D350mm x1	Straight	4	3	7140/84W



Light Distribution

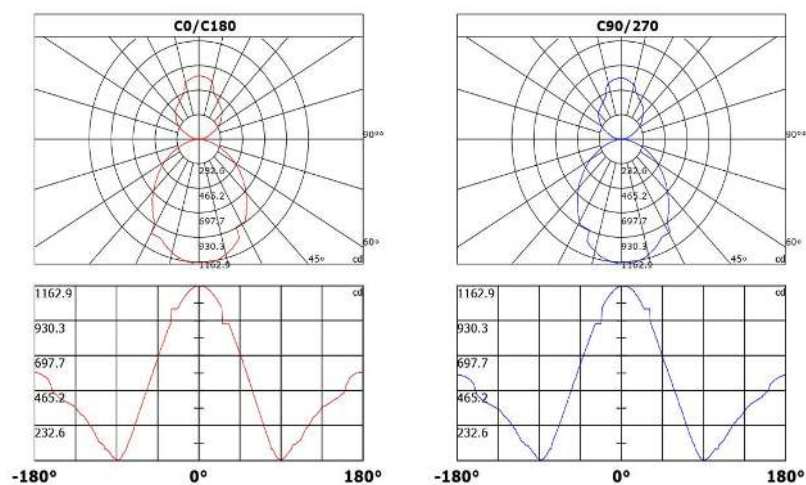

Optical system

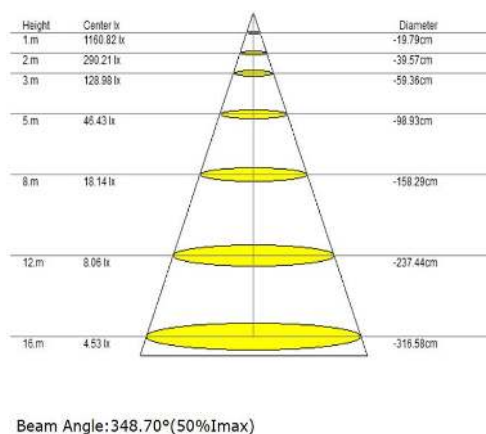

Material

LED system

LED Driver	Osram AC220-240V, PF>0.9, no flicker, CE Cert	LED	Samsung 2835, 3V, 150mA
Alu PCB	2.0W/M/K, UL Cert	CCT	4000K with a great color consistency (within 6-step MacAdam ellipse)
Housing	6063 Alumium, Powder coating	Led life	Minimum 50,000h with 70% of lumen maintenance in 25C ambient temperature, in compliance with IES LM-80 testing measurements
Lens	PC, UL-94VO, Anti-UV	Operation temp	- 20C to 40C (centigrade)





To complete your selection

				Item No	LED	Dimming	Suspension	Finish
Size :	Ø mm	Ø Inches	LED Watt					
	600mm	23.6"	40W	AO0600				
	900mm	35.4"	60W	AO0900				
	1200mm	47.2"	84W	AO1200				
LED:	Standard:	Neutral-White	4000K		4000			
	Optional:	Warm-White Extra Warm-White	3000K 2700K		3000 2700			
Dimming:	Standard:	Without Dimmer				10		
	Optional:	0-10v DALI-2				20 30		
Suspension:	Standard:	Straight Cable					SC	
Frame Finish:	Matt Black	RAL 9011						9011
	Matt White	RAL 9010						9010
	Matt Silver	RAL 9006						9006
	Customized**	RAL XXXX						XXXX
								

Complete order number

* Customized diameter can be provided with additional charge, please revert to supplier for more information

** Customized colors can be provided with additional charge, please revert to supplier for more information