




Acoustic Felt Outer Surface


- Flexible dimensions to choose from
- High Quality Felt in 96 color options
- NRC Value 0.8
- Operation Voltage: AC220-240V
- Direct illumination
- Efficiency: ≥ 100 lm/w
- CRI: +90
- Cable Straight Suspended-Standard Cable Length 1500mm (can be customized)

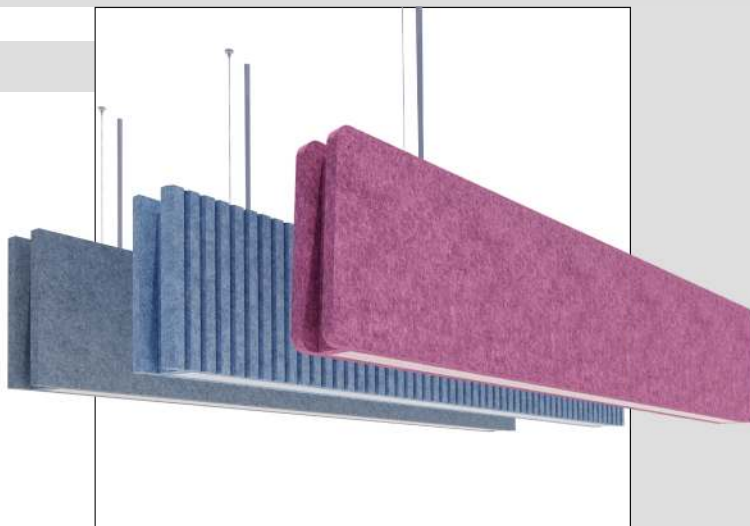


Configuration

Cable Straight Suspended (1500mm std.)	Baffle Length*	Baffle Height*	Suspension Points	Direct Lumen/Watt
	1320mm	200mm 300mm	2	4000/40W
	1620mm	200mm 300mm	2	5000/50W
	2516mm	200mm 300mm	2	8000/80W

Light Distribution

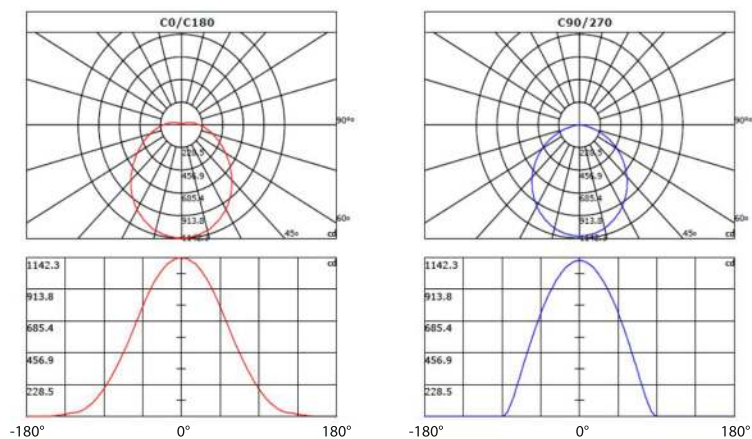

Optical system

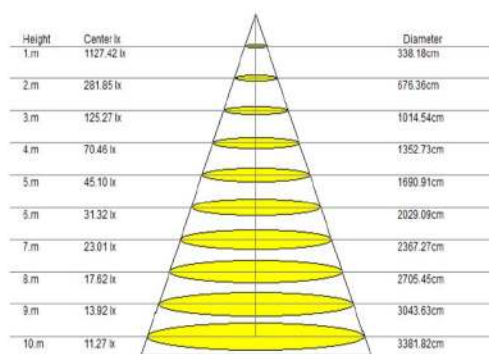

Beam Angle: 118°(50%Imax)

Material

LED Driver	Osram AC220-240V, PF>0.9, no flicker, CE Cert	LED	Samsung 2835, 3V, 150mA
Alu PCB	2.0W/M/K, UL Cert	CCT	2700K, 3000K, 3500K, 4000K and 5000K with a great color consistency (within 6-step MacAdam ellipse).
Housing	Alumium 6063, Black	Led life	Minimum 50,000h with 70% of lumen maintenance in 25C ambient temperature, in compliance with IES LM-80 testing measurements.
Lens	PC, UL-94VO, Anti-UV	Operation temp	minus 20C to 40C (centigrade)

LED system





LINEAR LUX BAFFLE LIGHT SERIES

PRODUCT DATASHEET

Technical Drawings

Side view

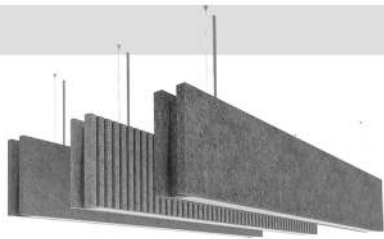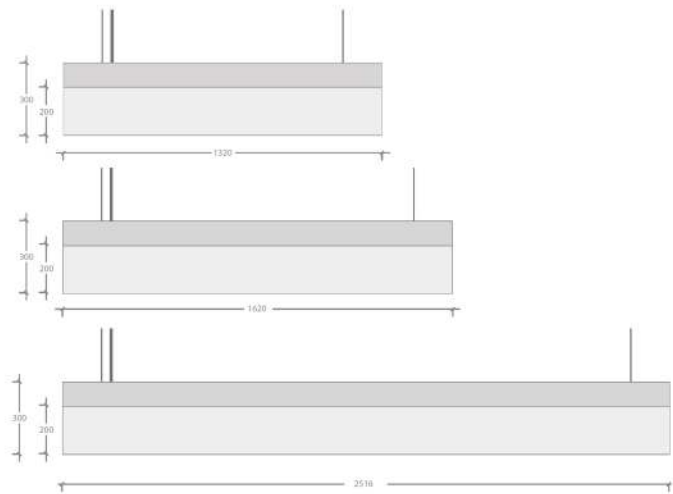


Lighting Plan




Edge Options

Straight




Curved




Surface Options

Plain




Carved




Color Options

Solid - (Standard)




Combination

Make it your own, belt color can be selected from our 96 felt option colors



Color Options

A Design Twist!
Select your own color mix from our 96 felt option colors





To complete your selection				Baffle L*	Baffle H*	CCT*	Dimming	Edge	Surface	Color	Felt Color* (Side 1)	Felt Color* (Side 2)	Belt Color
Baffle Length*	mm	Inches	LED Watt										
	1320mm	51.9"	40W	LLB1320									
	1620mm	63.7"	50W	LLB1620									
Baffle Height*	mm	Inches											
	200mm	7.8"			200								
	300mm	11.8"			300								
CCT*:	Standard:	Neutral-White	4000K			4000							
	Optional:	Warm-White	3000K			3000							
		Extra Warm-White	2700K			2700							
Dimming:	Standard:	Without Dimmer					10						
	Optional:	0-10v					20						
		DALI-2					30						
Edge:	Straight Edge							SE					
	Curved Edge							CE					
Surface Finish:	Plain								PS				
	Carved								CS				
Color:	Solid									SC			
	Combination									CC			
Felt Color:** (Side 1)											F XXXX		
Felt Color:** (Side 2)												F XXXX	
Belt Color:**													F XXXX



Complete order number

Acoustic PET Felt Color Range



* Customization can be provided with additional charge, please revert to supplier for more information