



Acoustic felt Outer Surface


- Flexible diameter size to choose from
- NRC: 0.8
- High Quality Felt in 96 color options
- Aluminum body construction
- Operation Voltage: AC220-240V
- Direct illumination
- Efficiency: ≥80lm/w
- CRI: ≥90
- Face Mounted or Straight Cable  
Suspended-Standard Cable Length 1500mm  
(can be customized)




Configuration

| Face Mounted /<br>Straight Cable Suspended | Light Diameter* | Height<br>(Cable Suspended) | Height<br>(Face Mounted) | Suspension Points | Direct Lumen/Watt |
|--------------------------------------------|-----------------|-----------------------------|--------------------------|-------------------|-------------------|
|                                            | 400mm           | 36mm                        | 55mm                     | 5                 | 1600/20W          |

Light Distribution

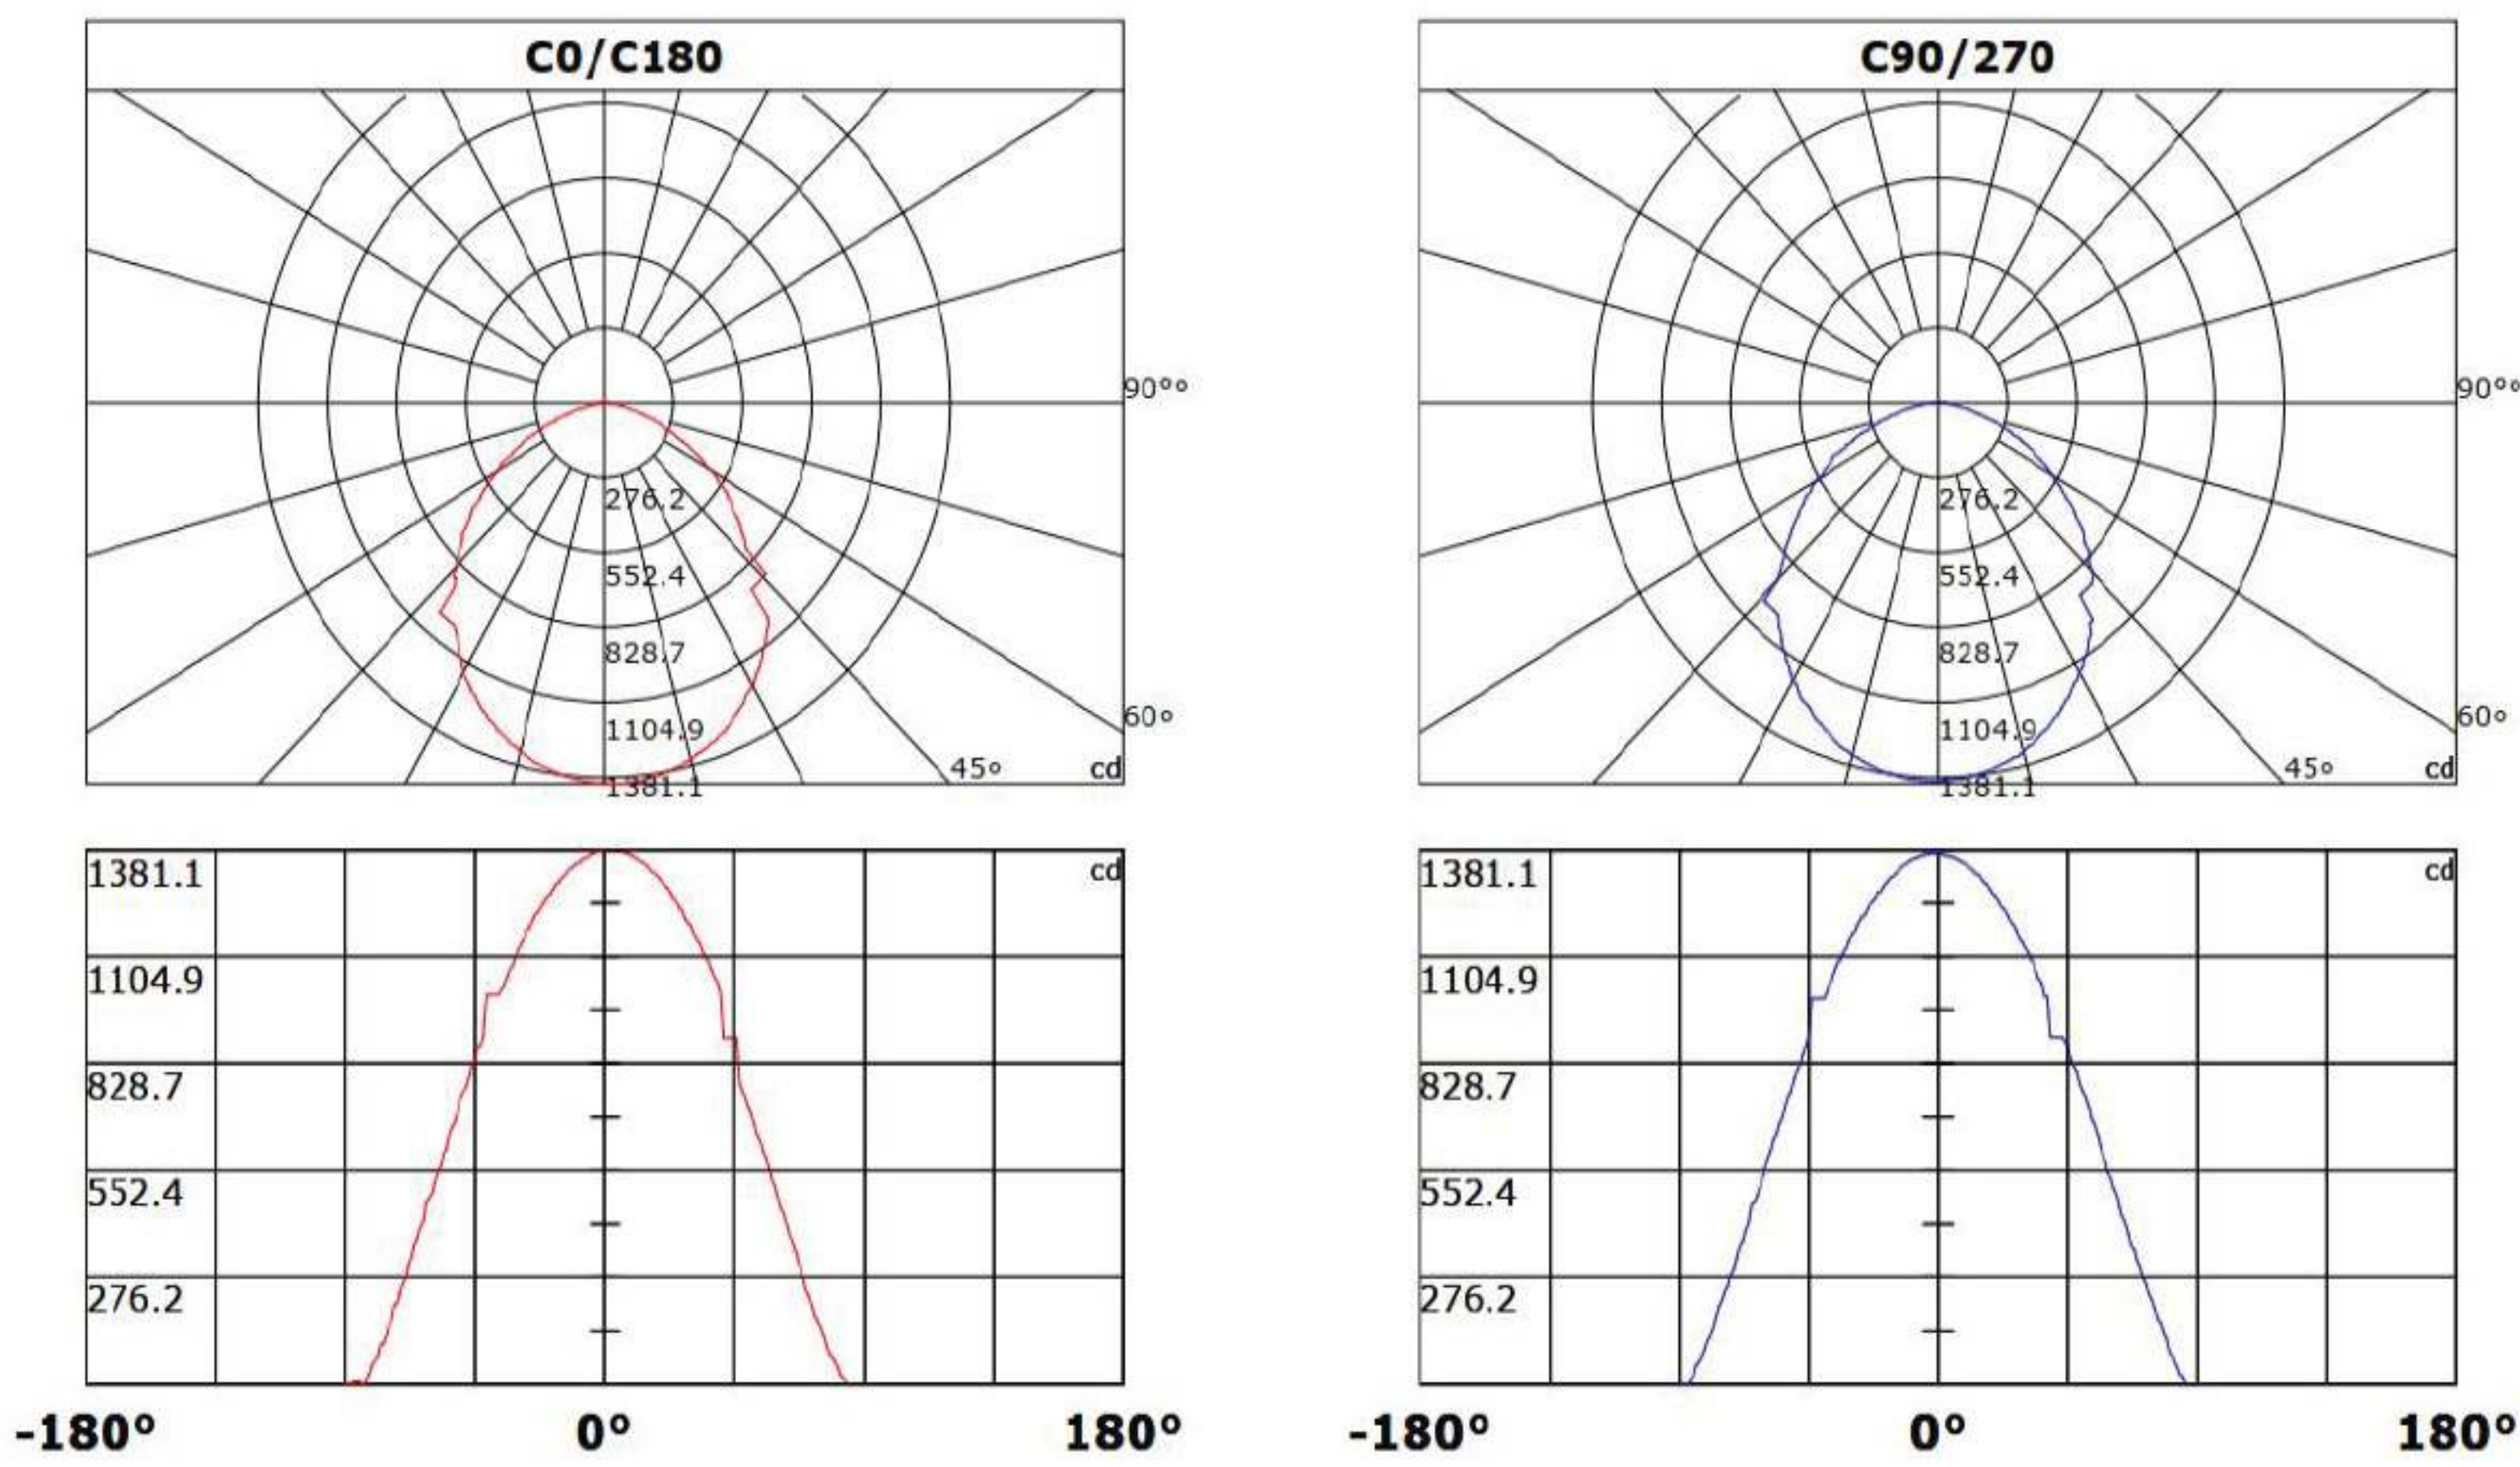

Optical system

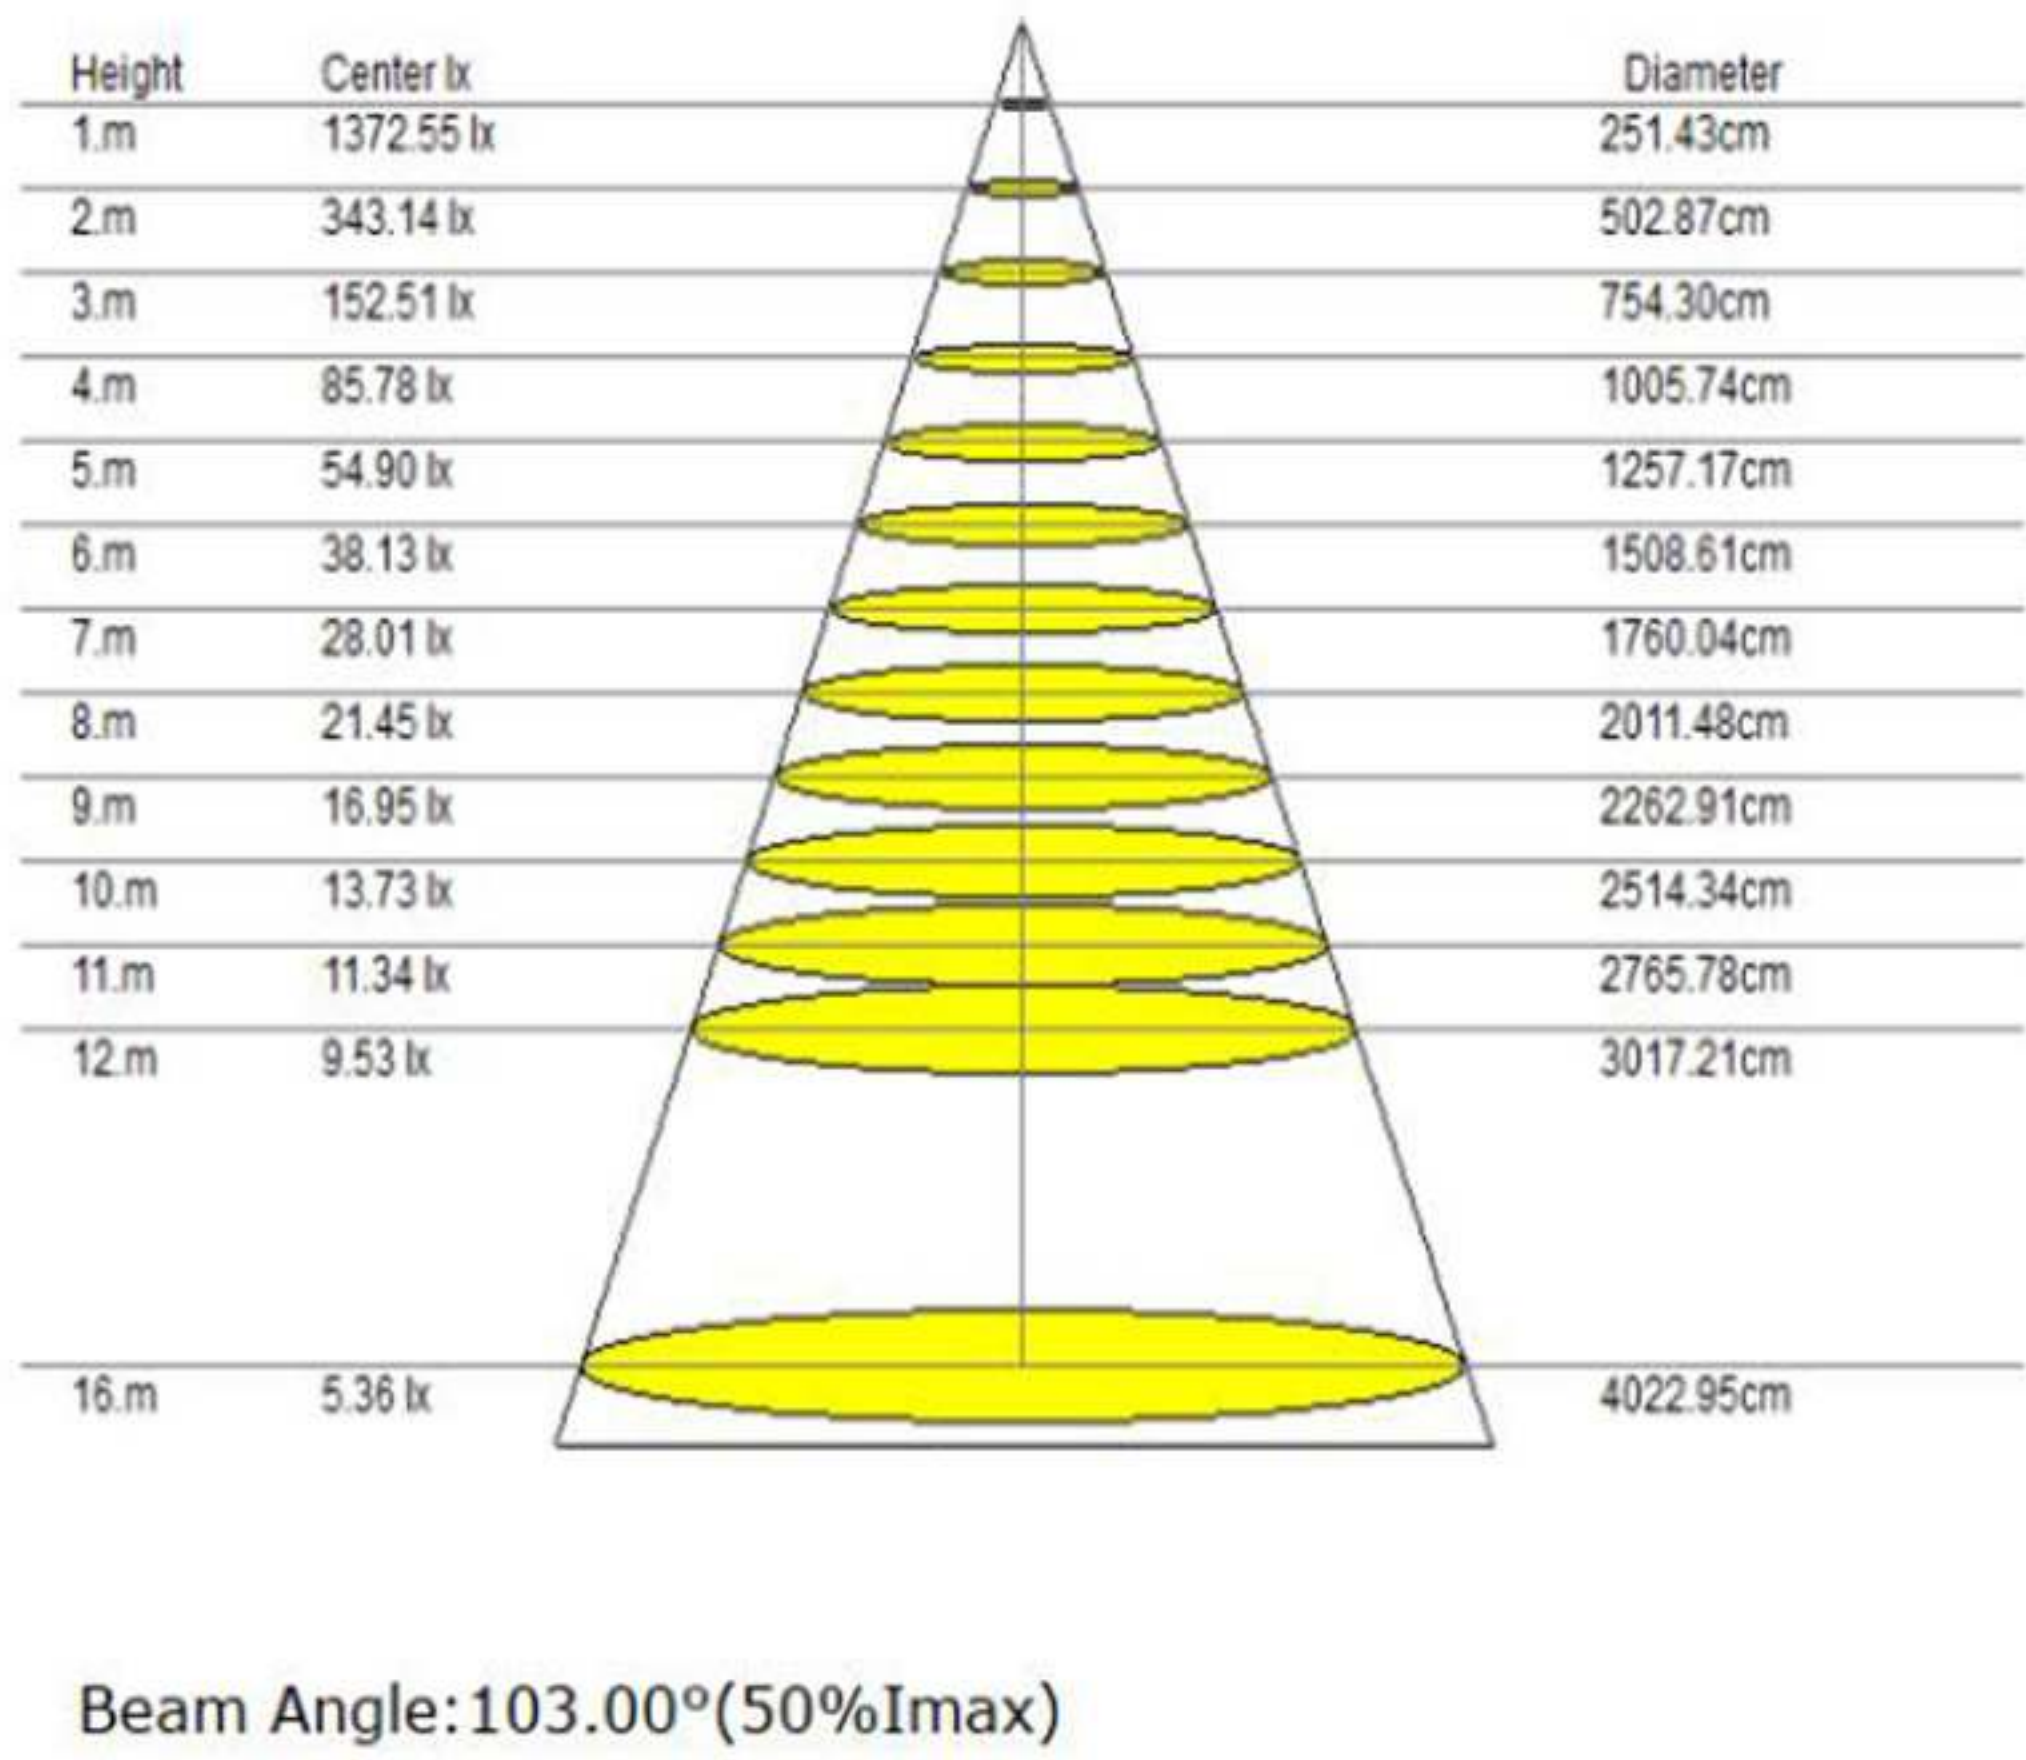

Material

LED system

|            |                                                  |                |                                                                                                                                   |
|------------|--------------------------------------------------|----------------|-----------------------------------------------------------------------------------------------------------------------------------|
| LED Driver | Osram<br>AC220-240V, PF>0.9, no Flicker, CE Cert | LED            | Samsung 2835, 9V, 100mA                                                                                                           |
| Alu PCB    | 2.0W.M/K, UL Cert                                | CCT            | 2700K,3000K, and 4000K with a great color consistency<br>(within 6-step MacAdam ellipse)                                          |
| Housing    | Alumium6063, Painting                            | Led life       | Minimum 50,000h with 70% of lumen maintenance<br>in 25C ambient temperature, in compliance with IES<br>LM-80 testing measurements |
| Lens       | PC, UL-94VO, Anti-UV                             | Operation temp | -20C to 40C (centigrade)                                                                                                          |







HALO - A




HALO - B

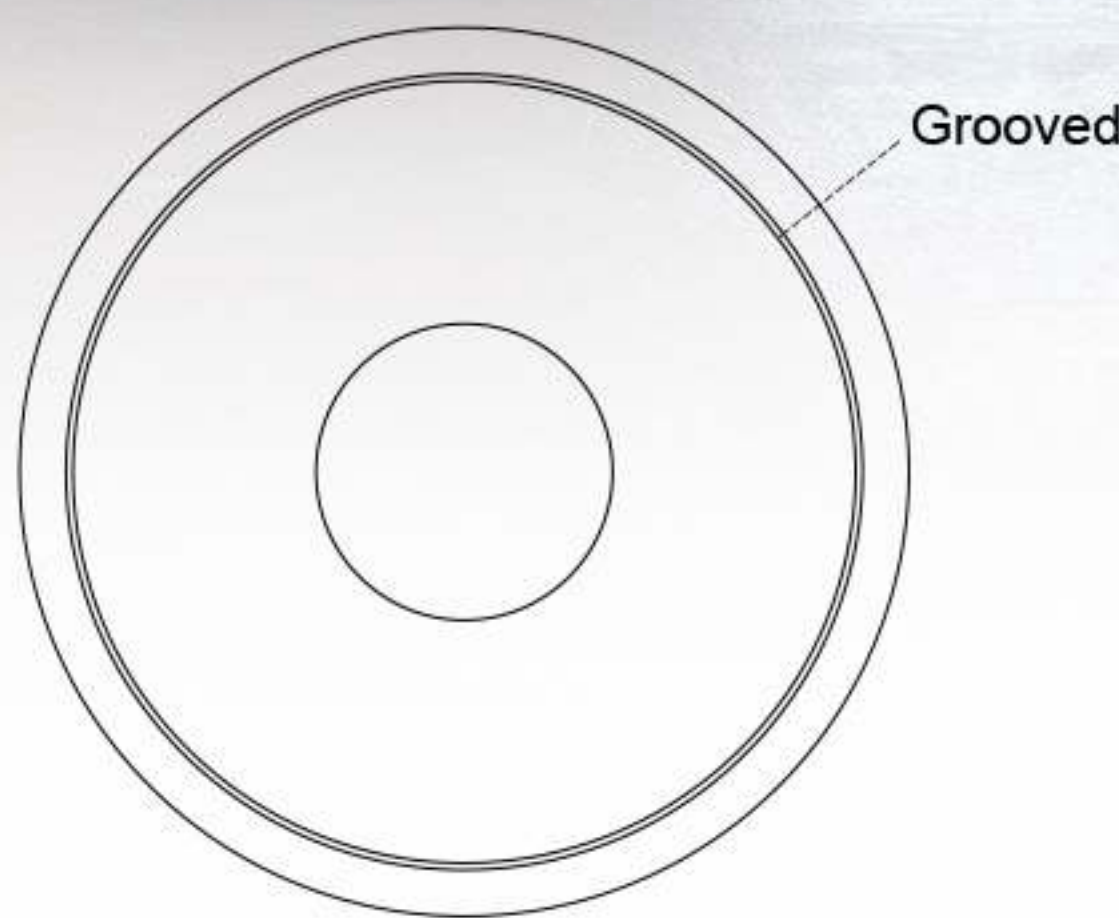

HALO - C

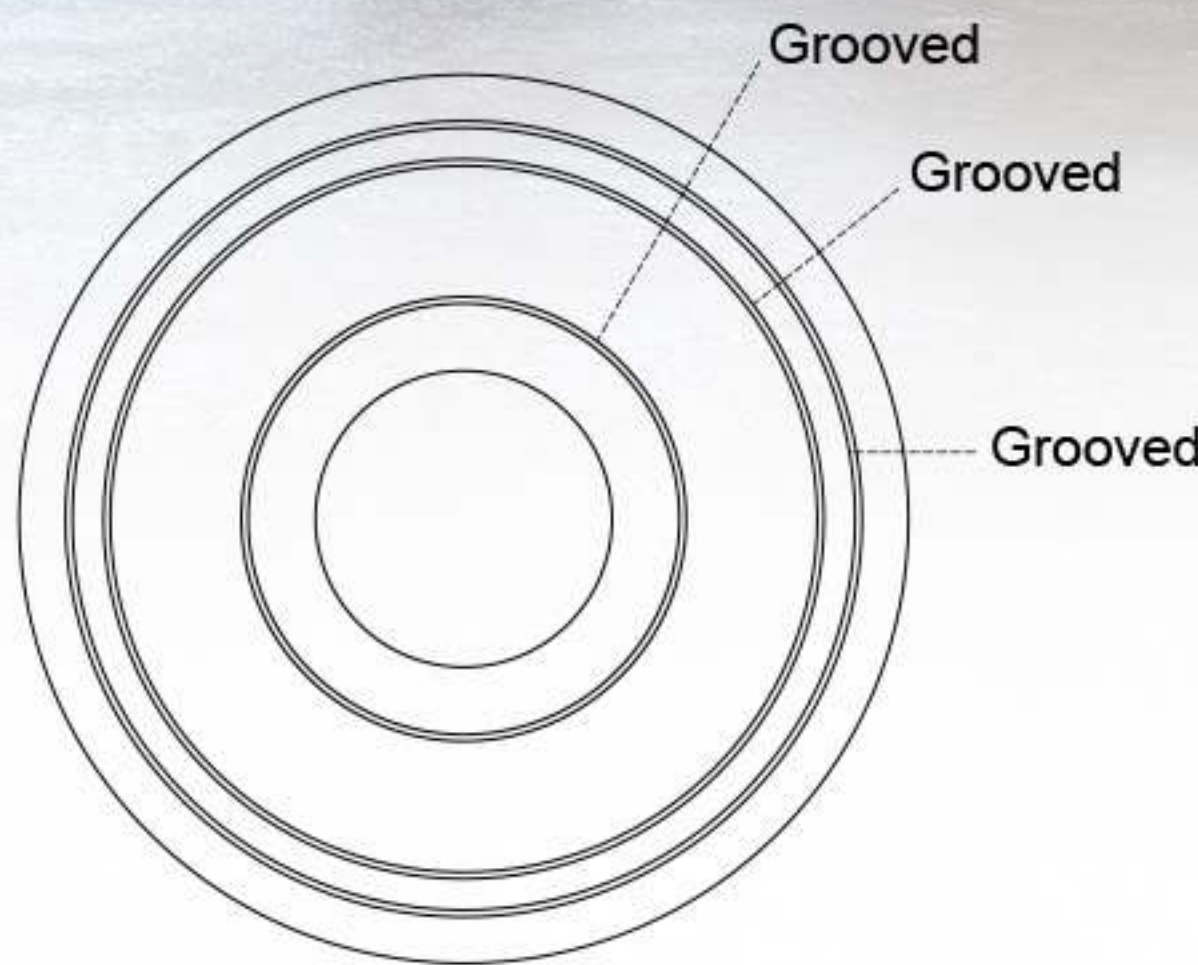

HALO - D

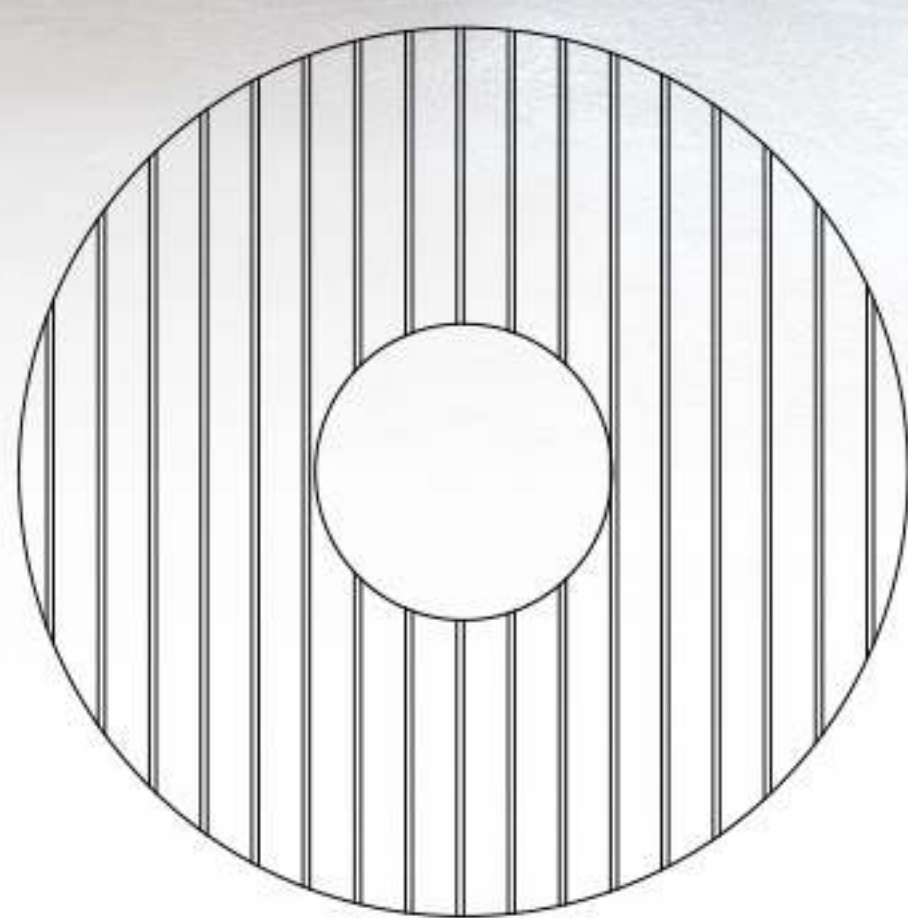


| To complete your selection |                                |                  |             | Design Code                                  | Felt Diameter**            | LED                  | Dimming        | Suspension | Finish       | Felt Color*** |
|----------------------------|--------------------------------|------------------|-------------|----------------------------------------------|----------------------------|----------------------|----------------|------------|--------------|---------------|
| Design Code:               | HALO - A                       |                  |             | HALO - A<br>HALO - B<br>HALO - C<br>HALO - D |                            |                      |                |            |              |               |
|                            | HALO - B                       |                  |             |                                              |                            |                      |                |            |              |               |
|                            | HALO - C                       |                  |             |                                              |                            |                      |                |            |              |               |
|                            | HALO - D                       |                  |             |                                              |                            |                      |                |            |              |               |
| Felt Diameter:**           | Ø mm                           | Ø Inches         |             |                                              | LH0800<br>LH1000<br>LH1200 |                      |                |            |              |               |
|                            | 800mm                          | 31.5"            |             |                                              |                            |                      |                |            |              |               |
|                            | 1000mm                         | 39.4"            |             |                                              |                            |                      |                |            |              |               |
|                            | 1200mm                         | 47.2"            |             |                                              |                            |                      |                |            |              |               |
| LED:                       | Standard:                      | Neutral-White    | 4000K       |                                              |                            | 4000<br>3000<br>2700 |                |            |              |               |
|                            | Optional:                      | Warm-White       | 3000K       |                                              |                            |                      |                |            |              |               |
|                            |                                | Extra Warm-White | 2700K       |                                              |                            |                      |                |            |              |               |
| Dimming:                   | Standard:                      | Without Dimmer   |             |                                              |                            |                      | 10<br>20<br>30 |            |              |               |
|                            | Optional:                      | 0-10v            |             |                                              |                            |                      |                |            |              |               |
|                            |                                | DALI-2           |             |                                              |                            |                      |                |            |              |               |
| Suspension:                | Straight Cable<br>Face Mounted |                  |             |                                              |                            |                      |                | SC<br>FM   |              |               |
| Frame Finish:              | Matt Black                     | RAL 9011         | <div></div> |                                              |                            |                      |                |            | 9011<br>9010 |               |
|                            | Matt White                     | RAL 9010         | <div></div> |                                              |                            |                      |                |            |              |               |
| Felt Color:***             |                                |                  |             |                                              |                            |                      |                |            |              | XXX           |
| <div>➔</div>               |                                |                  |             |                                              |                            |                      |                |            |              |               |

Complete order number

Complete order number

Acoustic PET Felt Color Range

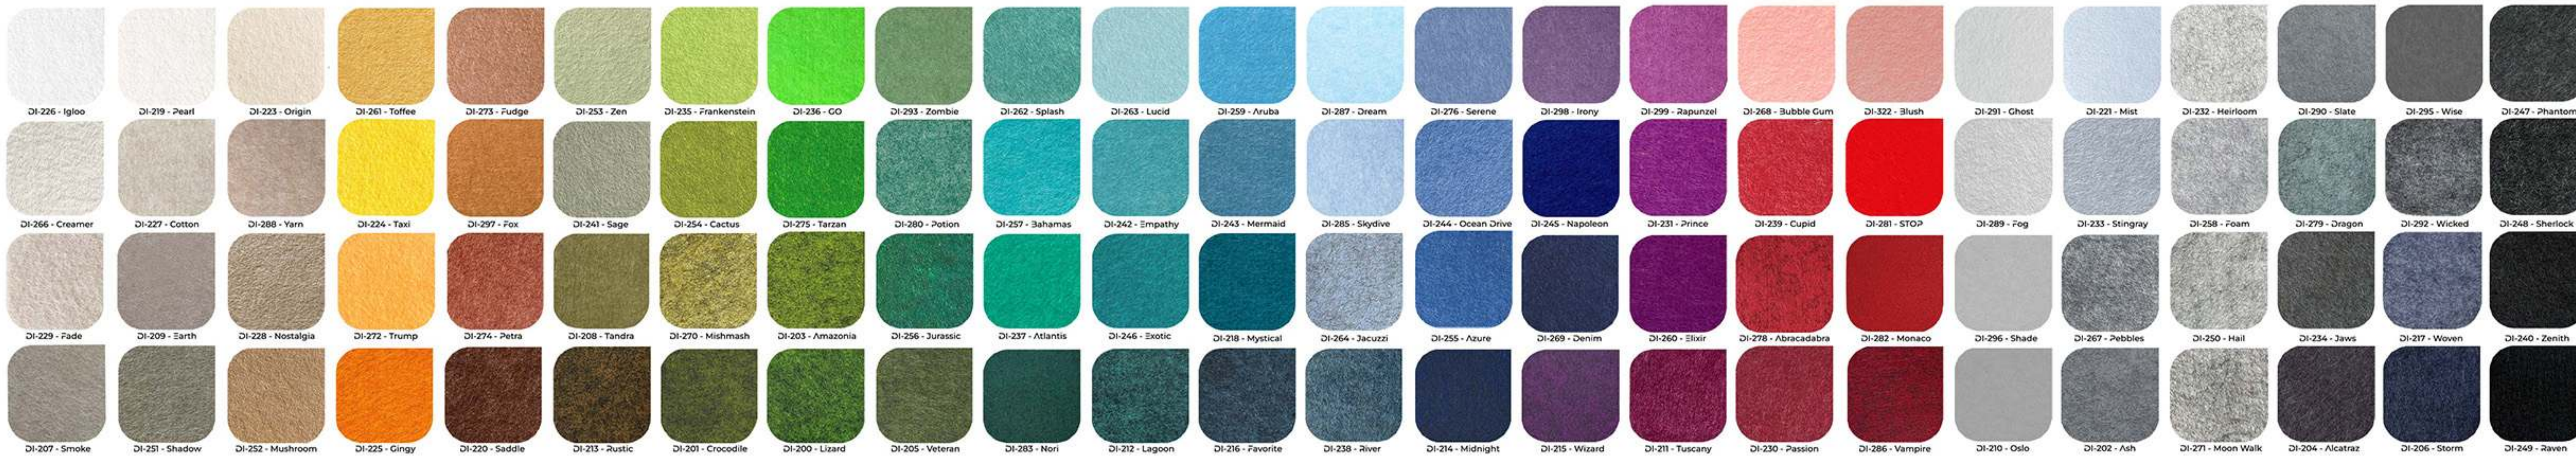

\* Customized light diameter can be provided with additional charge, please revert to supplier for more information

\*\* Customized felt diameter can be provided with additional charge, please revert to supplier for more information

\*\*\* Customized felt colors can be provided with MOQ, please revert to supplier for more information