






DICOUSTIC

Acoustic PET Felt Panels

F-PC001-Origin

1200 x 2400 x 12 mm 1200 x 2400 x 24 mm
1200 x 2780 x 12 mm 1200 x 2780 x 24 mm
1200 x 3000 x 12 mm* 1200 x 3000 x 24 mm*

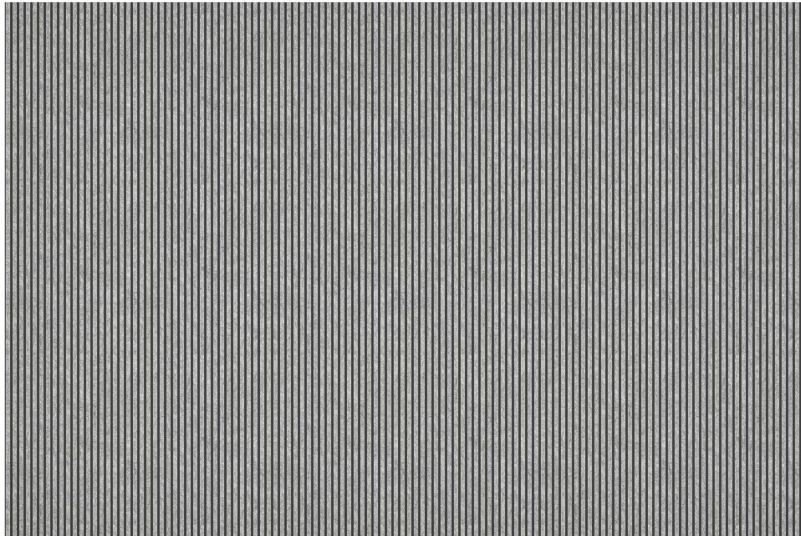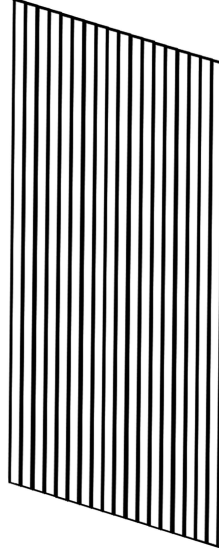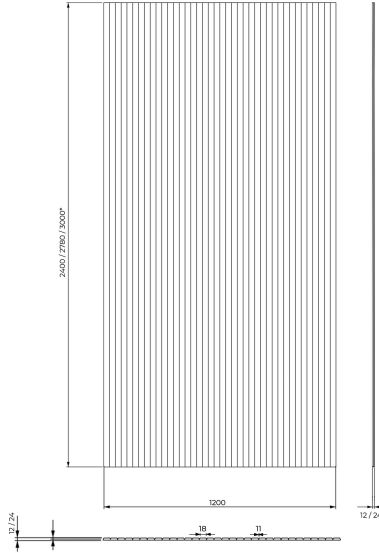

Product Specifications

Panel Dimensions*	1200 mm x 2400 mm 1200 mm x 2780 mm 1200 mm x 3000 mm* * Custom sizes MOQ = 750 Sqm
Composition	Min. 75% post-consumer recycled materials (PET Bottles)
Tolerance	± 0.5%
Thickness	12 mm , 24 mm
Thermal Performance	DI-Panel 12 mm (R0.41 (@15c)) DI-Panel 24 mm (R0.82 (@15c))
Microbial Resistance	ASTM (G15- 21) Growth rating: 0 (No Growth) Dicooustic Panel does not promote the growth of moulds and mildew
Absorption Coefficient According to ISO 354	(12 mm) - NRC 0.45 (12 mm with 25 mm air gap) - NRC 0.7 (24 mm) - NRC 0.7 (24 mm with 25 mm air gap) - NRC 0.8
VOC	Private Office-Wall-Pass School Classroom-Wall-Pass Single Family Residence-Wall-Pass Private Office-Ceiling-Pass School Classroom-Ceiling-Pass Single Family Residence-Ceiling-pass
Fire ratings	EN13501-1:2018 Class B-s2,d0 **ASTM E84-2018 Class A ** Optional
DICOUSTIC Panels has been evaluated using the following test method	

Acoustical

Easy Install

Fire Rated

Easy Clean

Printable

Light Weight

Recyclable

Recycled PET

VOC Free

Insulation

Impact Resistant

Antimicrobial

Tackable

Warranty

Custom colors MOQ 1500 Sqm
For further cleaning details please refer to our DICOUSTIC Product Cleaning Guide

Acoustic PET Felt Color Range

